





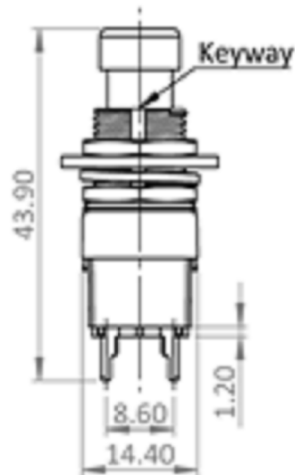


ISS.	AMEND	DATE
1	WAS ON FC7102	15/02/18

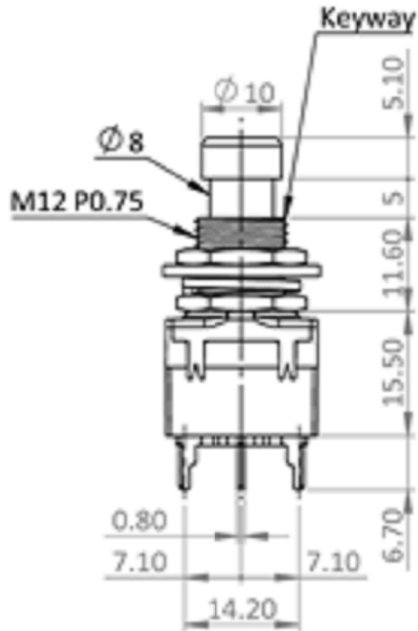

### PC MOUNTING

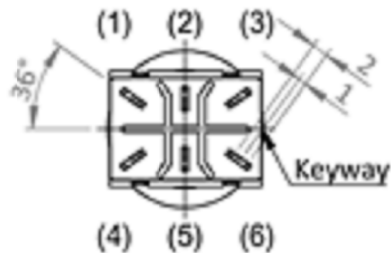

- 1.Rating : AC 125V 4A 250V 2A
- 2.Contact R. : 50mΩ Max.
- 3.Insulation R. : DC 500V 100MΩ Min.
- 4.Dielectric Strength : AC 1500V 1 minute.
- 5.Electrical Life : 50,000 make-and-break cycles at full load.
- 6.Operating temperature : -20°C~65°C

PART No.	SWITCH TYPE
FC7106	DPDT MOMENTARY
FC71065	DPDT ON/OFF

**RoHS**  
COMPLIANT

TOLERANCE  
 NO DEC. PLACE ±  
 1 DEC. PLACE ±  
 2 DEC. PLACE ±  
 HOLE Ø ±  
 ANGLES ±  
 UNLESS  
 OTHERWISE STATED

1st DRAWN 20/10/93

**Cliff Electronic Components Ltd.**  
 76 Holmethorpe Avenue, Holmethorpe Industrial Estate,  
 Redhill, Surrey, RH1 2PF, England, UK  
 Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

3rd ANGLE PROJECTION:

DO NOT SCALE

MATERIAL: Ni HARDWARE / TIN PLATED / AS MOULDED

TITLE: P/B SWITCH DPDT - PC

FINISH: BRASS / STEEL / PPS

DRAWN: T.J.O.

APPROVED: D.P.J.

DRWG. No. **FC7106**

FORM: A4DRWGf